

Intellian MIM

Compatible with DISH NETWORK DP34



Enables reception of all DISH Network's satellites

Enables reception from multiple Echostar satellites for complete channel guide downloads.

Automatic satellites switching

Switching satellites automatically is possible by using a user's receiver's remote controller.

Outstanding compatibility

Intellian MIM is compatible with all Intellian i-series antenna systems.

Easy & simple connection and installation

Connects up to 4 receivers directly, or it can be connected to additional MIMs for unlimited extension.

Master receiver selection

Provides users to select which receiver connected to the MIM will be to "Master" receiver. An interruption-free for secondary viewers.

FCC/CE approved. Lab & field tested

Proven simplicity and reliability design is committed to meet and exceed the highest industry standards.

Intellian

Connect with the best

Intellian MIM

Intellian MIM

The Intellian Multi-satellite Interface Multi-switch (MIM) utilizes leading-edge technology to emulate the DISH Network DP-34 multi-switch, in a rugged case designed for the marine environment. The user-friendly design of the MIM offers satellite subscribers to access their favorite standard definition and highdefinition (HD) programming and switches automatically between DISH Networks' Western Arc of 110°W, 119°W, and 129°W satellites, the DISH Network Eastern Arc of 61.5°W, 72.7°W, and 77°W, or the Bell TV satellites at 82°W and 91°W.


By communicating with the receiver and verifying reception, the "Check Switch" function of the receiver is completed successfully, resulting in a download of the complete program guide. By simply selecting a channel from the guide on the master receiver, the antenna will automatically focus on the proper satellite. The master receiver can be easily selected on the MIM, and changed at any time by merely pressing a button.

Technical Specifications

Part	Specifications
M2-TD02	Multi-satellite Interface Multi-switch
Physical	
Dimensions(WxDxH)	10.2 in (26cm) x 5.7 in (14.6cm) x 1.1 in (2.8cm)
Storage Temp. Range	1.4 lbs (0.64 kg)
Environmental	
Operating Temp. Range	5°F ~ 130°F (-15°C
Storage Temp. Range	-13°F ~ 158°F (-25°C ~ 70°C)
Approvals	CE / FCC
Warranty	3 years parts and 2 year labor
Interface	
RF Port	2 x 4 Multi S/W and Expansion 2RF Ports
PC Interface	RS232 - DB9
ACU Interface	RS232 - DB9
Control Key	One Integrated Push Button
Display	4 LEDs
Power Input	12 VDC (Max 10W) Adaptor : Input 100-240 VAC 50/60Hz, Output : 12VDC 3.33A


Compatible with DISH NETWORK DP34

System Dimension

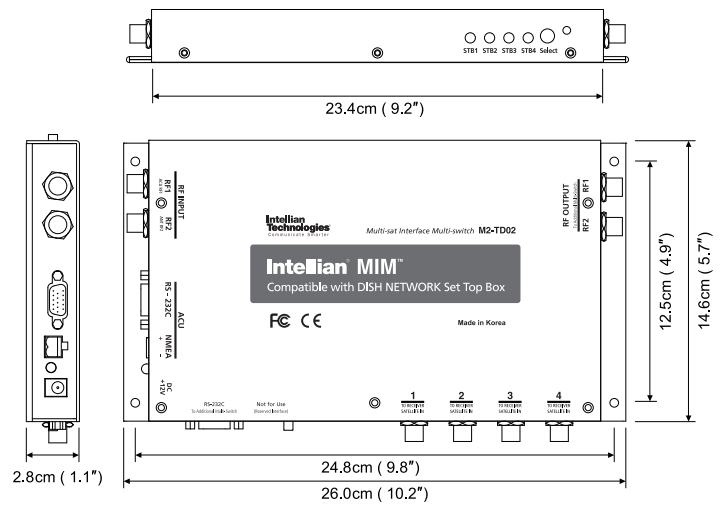


System Diagram

Multi-Receiver (up to 4) Configuration

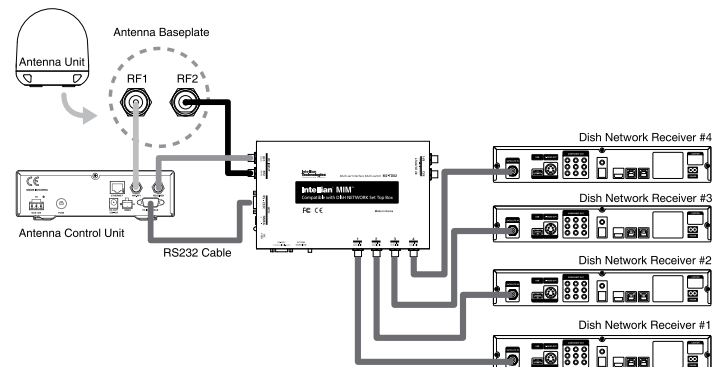

Multi-MIMs & Multi - Receivers (up to 8) Configuration

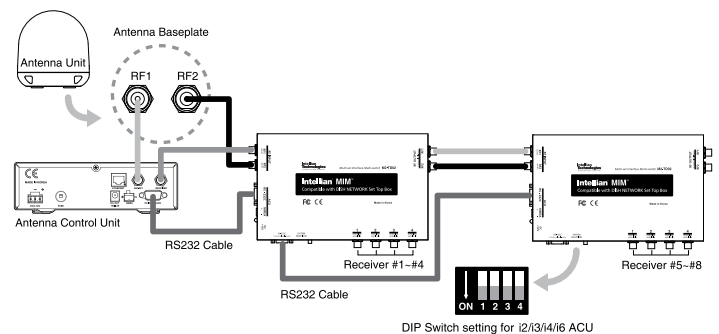

Intellian

Global HQ
Innovation Center / Factory
Intellian Technologies, Inc.
T +82 31 379 1000
F +82 31 377 6185

APAC
Seoul Office
Intellian Technologies, Inc.
T +82 2 511 2244
F +82 2 511 2235

Americas
Irvine Office
Intellian Technologies USA, Inc.
T +1 949 727 4498
F +1 949 271 4183
Toll Free +1 888-201-9223

EMEA
Rotterdam Office
Intellian B.V.
T +31 1 0820 8655
F +31 1 0820 8656