Intellian GX60

65cm Global Xpress Terminal



I Maritime Connectivity Made Simple

Intellian and Inmarsat have partnered to deliver a high speed connectivity solution as easy to adopt as Fleet Broadband. Easy, standardized equipment. Single global network. Intuitive User Interface.

All in One Below Deck Terminal

Features a built in GX modem for simplified installation and reduced overall space requirements. Wi-Fi enabled for wireless management via Intellian's Aptus PC or Mobile remote management application. Built in 8 Port Ethernet Switch provides VLAN capability, all in a single, 19" rack type 1U case. Integrated AC Power Supply (no additional components needed) and front panel touch display with easy navigation buttons.

I Enterprise Enabling Speed

The Global Xpress constellation is the world's first global High Throughput Satellite network to come to market. Users will be able to connect at speeds measured in Megabits, as opposed to Kilobits, all at reasonable service rates.

I Industry-leading Standards Compliance

The GX Series meets CE and FCC regulatory compliances as well as EN60945, EN60950, RED and FCC Part 15. They are also designed to meet MIL-STD 167.

From In Port to Online in 4 Hours

Quick-Deploy packaging, pre-slung lifting straps, Intellian's Aptus Graphical User Interface and a single, integrated Below Deck Terminal (BDT) enable fast and easy installation of the GX Series. Captains and Fleet managers can count on quick, pain-free installation to get vessels connected and back out to sea swiftly.

One Touch Commissioning

Goes from power-up to network connectivity in 30 seconds. No calls to the Network Operations Center (NOC) required. No post installation configuration (option file) needed. System is pre-configured for easy, rapid deployment.

FB250/500 Compatibility

All Intellian systems feature an Intellian LAN function, enabling all onboard devices to be easily networked out of the box with no additional hardware. For the ultimate in service reliability, or for out of band management solutions, the GX Series easily integrates with Intellian's FB250 or 500 terminals.

Redundant Antenna Systems

A redundant system can be easily configured by using the Intellian GX Mediator to connect two antennas. Preventing network outages due to antenna blockage.




Intellian GX60

I Technical Specifications

Above Deck Unit

Radome Height	103cm / 40.5"
Radome Diameter	90cm / 35.5"
Reflector Diameter	65cm / 25.6"
Weight	Approx. 60kg / 132lbs
Platform	3-axis : Azimuth, Elevation, Cross-level
Azimuth Range	Unlimited
Elevation Range	-20° to +115°
Cross-level Range	Up to ±37°
Stabilization Accuracy	0.2° max in presence of specified ship motions
Motor Brake System	Elevation, Cross-Level
Power Requirement	100~240V AC, 50~60Hz, 4A
TX Frequency	29.00~30GHz Ka-band
TX Gain	43.75 dBi @ 29.5GHz (with Radome)
RX Frequency	19.2~20.2GHz Ka-band
RX Gain	40 dBi @ 19.7GHz (with Radome)
G/T	> 16.2 dB/K (min.)
BUC	5W Ka-band BUC
LNB	Ka-band LNB (L.O. 18.25GHz)
Polarization	Circular, Tx : RHCP / Rx : LHCP
Below Deck Terminal	
Dimensions (WxDxH)	43.1cm x 44.1cm x 4.4cm / 17" x 17.3" x 1.7"
Weight	4kg / 8.8lbs
Display	2 line 40 character graphic VFD module
Ship's Gyrocompass Interface	NMEA 2000 / NMEA 0183
Modem	Integrated Global Express Modem
Remote Management	Yes
Wi-Fi Operation	Yes
Management Port	Yes (Ethernet/ USB/ Serial)
Power Requirement	100~240V AC, 50~60Hz, 1A

System Dimensions

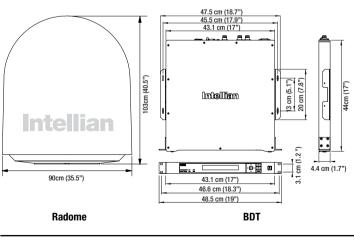



Global HQ Innovation Center Intellian Technologies, Inc T +82 31 379 1000 F +82 31 377 6185

APAC Seoul Intellian Technologies, Inc. T +82 2 511 2244 F +82 2 511 2235

Americas Irvine Intellian Technologies USA, Inc. T +1 949 727 4498 F +1 949 271 4183 Toll Free +1 888-201-9223

T +31 1 0820 8655 F +31 1 0820 8656

EMEA

Rotterdam

Intellian B.V.


Key Features

 Compact and ready-to-use All-in-One Below Deck Terminal Enterprise Enabling Speed

65cm Global Xpress Terminal

- One-Touch Commissioning
- Inmarsat Type Approved
- From In Port to Online in 4 Hours
- Single Network, Global Coverage
- Fully supports Fleet Xpress configuration
- FB250/FB500 Compatibility
- GX Mediator option for dual antenna solutions


All-in-One Below Deck Terminal



Connection Diagram (Single Antenna System)



Connection Diagram (Dual Antenna System)



2018_GX60-DS0326-V7 Part No.

©2018 Intellian Technologies, Inc. All rights reserved. Intellian and the Intellian logo are registered trademarks. GX60 and GX-Series are trademarks of Intellian Technologies, Inc. in the U.S. and/or various countries. All other trademarks are the property of their respective owners. Information in this document is subject to change without notice. ISO9001 / ISO14001 Certified Intellian has more offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Intellian Website at intelliantech.com